

SKW-V2/SKW-H2

Metal Shell & Waterproof

Ideal for outdoor installation



The SKW-V2 or SKW-H2 is a Standalone Keypad single-door controller with metal shell, It's rugged IP65 rated Waterproof structure offers extra durability and which makes it perfect for outdoor installations.

The value-added Auxiliary Input interface allows SKW-V2/SKW-H2 to link with an external source, for instance a smoke or gas detector etc., or an emergency switch. Once the linkage is triggered, the device would automatically generate an alarm signal and open the door in emergency cases of emergency situations.

The device has built-in wiegand out which makes it flexible either to connect with ZKTeco SRB mini controller for higher security, or connect with ZKTeco or any 3rd party controllers when switching to Reader Mode.

Features





- Reads password and/or 125 KHz EM card; Optional to read 13.56MHz Mifare card
- Built-in auxiliary input with enhanced flexibility to link with wired detector or emergency switch
- Supports SRB mini controller by wiegand out
- Supports switch to Reader Mode and configurable wiegand 26 bit or 34 bit
- Anti-vandal, waterproof & back-lit keypad with metal key buttons
- Audible beep and visible indicator provide feedback for the user
- Access control interfaces for electric lock, door sensor, alarm, exit button and doorbell
- Lock control delay, Unlock duration, Alarm delay are programmable from 0 to 254 second
- Optical tamper switch and multiple alarm outputs
- Robust, flexible and generous elegant design

Specifications

| | |
|--------------------------|---|
| LED Indicator | Blue, Red |
| Keypad | Blue backlit, Numeric keys 0~9, Function keys *, #, Bell |
| Verification Type | Card, PW, Card/PW, Card+PW |
| Built-in Card Reader | 125 kHz EM card (Optional 13.56 MHz Mifare card) |
| Card Capacity | 1,000 |
| Password Capacity | 8 Password Groups |
| Log Capacity | N/A |
| Communication | N/A |
| Access Control Interface | Electric lock, Door sensor, Alarm, Exit button and Doorbell |
| Wiegand Interface | Wiegand out |
| Auxiliary Interface | 1 ea Auxiliary Input for linkage function |
| Power In | 12V DC |
| Operating Temperature | -20 °C-50 °C |
| Operating Humidity | ≤95% |
| Specification(W×H×D) | SKW-V2: 50.2×160.2×21mm/SKW-H2: 86.2×120.2×21mm |
| Ingress Protection Rate | IP65 |

Configuration

Dimensions (mm)

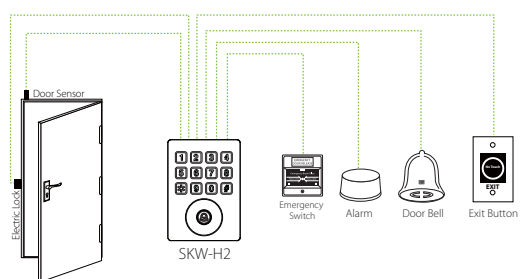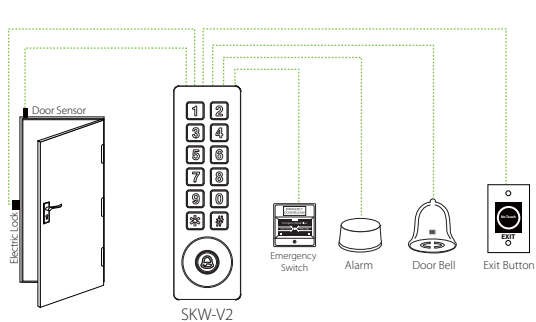

ZKTeco Europe.

Av. Camino de lo Cortao, 10. Nave 1.
28703 San Sebastián de los Reyes. Madrid. SPAIN
Tel: +34 916 532 891 E-mail: sales@zkteco.eu
www.zkteco.eu

© Copyright 2015. ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

